




## ECU BEARING LTD

2 Inch | 50.8 Millimeter x 3.125 Inch | 79.38  
Millimeter x 2.25 Inch | 57.15 Millimeter Rexnord  
ZA2200 Pillow Block Roller Bearing Units

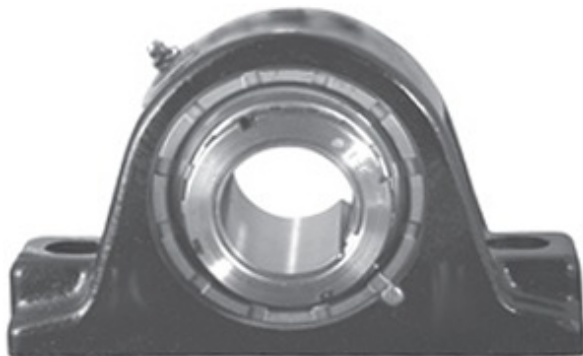

Bearing No. ZA2200

ZA2200 Bearing 2D drawings and 3D CAD models

|                           |  |
|---------------------------|--|
| Category                  | Pillow Block Bearings  |
| Inventory                 | 0.0  |
| Manufacturer Name         | REXNORD  |
| Minimum Buy Quantity      | N/A  |
| Weight                    | 4.86   |
| EAN                       | 0698210594138  |
| Product Group             | M06288   |
| Number of Mounting Holes  | 2  |
| Mounting Method           | Concentric Collar  |
| Housing Style             | 2 Bolt Pillow Block  |
| Rolling Element           | Spherical Roller Bearing   |
| Housing Material          | Cast Iron  |
| Expansion / Non-expansion | Non-expansion  |
| Mounting Bolts            | 5/8 Inch   |
| Relubricatable            | Yes  |
| Insert Part Number        | 2200U  |
| Seals                     | Clearance Seal   |
| Housing Configuration     | 1 Piece Solid  |
| Inch - Metric             | Inch   |
| Other Features            | Double Row   Normal Duty<br>  Single Collar   With Set<br>Screw  |
| Long Description          | 2 Bolt Pillow Block; 2" Bore;<br>2-1/4" Base to Center<br>Height; Concentric Collar<br>Mount; Spherical Roller |



## ECU BEARING LTD

|                               |   |
|-------------------------------|---|
|                               | Bearing; Relubricatable;<br>Cast Iron; Clearance Seal;<br>Non-expansion |
| Category                      | Pillow Block  |
| UNSPSC                        | 31171511  |
| Harmonized Tariff Code        | 8483.20.40.80   |
| Noun                          | Bearing   |
| Keyword String                | Pillow Block  |
| Manufacturer URL              | <a href="http://www.rexnord.com">http://www.rexnord.com</a>             |
| Manufacturer Item Number      | ZA2200  |
| Manufacturer Internal Number  | 6859413   |
| Weight / LBS                  | 10.7  |
| B                             | 2.25 Inch   57.15 Millimeter  |
| Actual Bolt Center to Center  | 6.3 Inch   159Millimeter  |
| d                             | 2 Inch   50.8 Millimeter  |
| Nominal Bolt Center to Center | 6.3 Inch   160 Millimeter   |
| D                             | 3.125 Inch   79.38<br>Millimeter  |
| Bolt Spacing Maximum          | 0 Inch   0Millimeter  |
| Bolt Spacing Minimum          | 0 Inch   0Millimeter  |